


Silicone, Vinyl Spacer, Wall Anchor & Expansion Material

Seves Glass Block S.R.O. | Bilinská 782/42 Duchcov, 419 01, Czech Republic
www.sevesglassblockinc.com

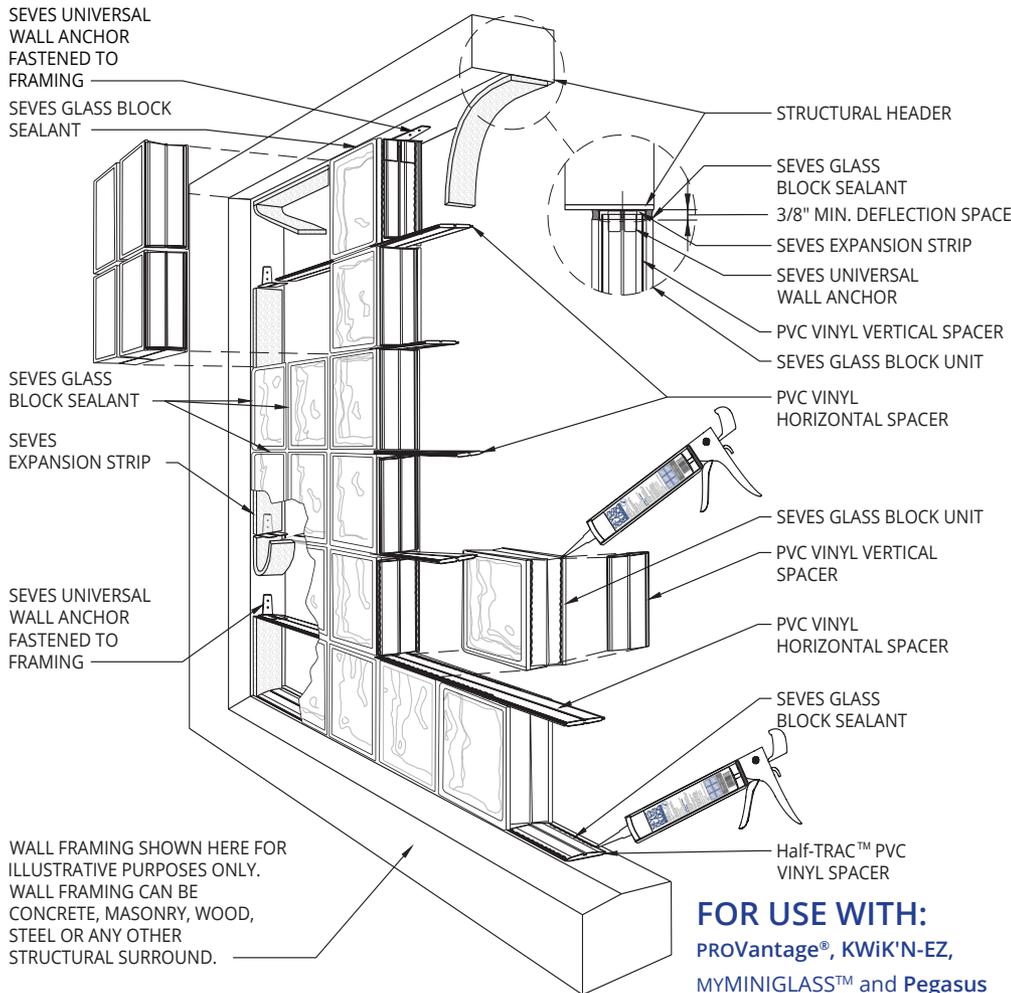

FOR USE WITH:
PROVantage®, KWIK'N-EZ,
MYMINIGLASS™ and Pegasus

Silicone and Vinyl Spacer Construction Assembly

UNIVERSAL WALL ANCHOR:


Stainless Steel AISI Type 304
Material Conformance: ASTM A666,
ASTM A480, ASTM A240/A240M, ASTM
A167



Polyethylene Foam 3" X 16" X 3/8"

Physical Properties	Test Method	Value*
Recovery (%)	ASTM D545 05	97.8%
Extrusion (in)	ASTM D545 05	0.12
Compressive Strength (psi)	ASTM D545 05 @ 50%	14.9
Compression Set (%)	ASTM D3575-00 SUFFIX B	18.3%
Tensile Stress (psi)	ASTM D3575-00 SUFFIX T	103 / 68
Tear Resistance (lb/in) md/cmd	ASTM D3575-00 SUFFIX G	14 / 24
Density (lb/ft ³)	ASTM D3575-00	1.7 (NOMINAL)
Water Absorption (lb/ft ³)	ASTM 545-00	0.001

Meets Application Requirements of:
ASTM D 4819

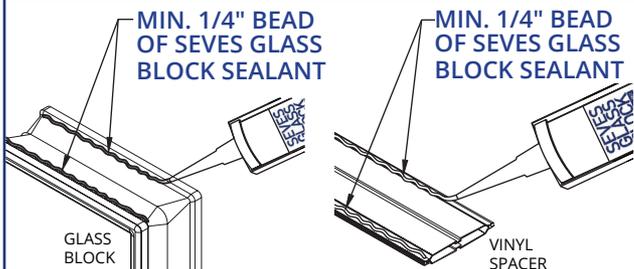

Seves Glass Block Sealant is a one component, low modulus, neutral cure silicone sealant and adhesive specifically formulated to work with Seves PROVantage®, Seves Kwik'N EZ®, MYMINIGLASS™, and Pegasus Glass Block Installation Systems. Seves Glass Block Sealant also bonds to a wide variety of building substrata. This product is specifically formulated to offer all weather performance to meet today's Green Building Standards.



Perimeter Channels

Vinyl perimeter channels for smaller applications. (Residential & light commercial applications. in lieu of Universal Wall Anchors.)



Horizontal/Vertical Vinyl Spacers

Vinyl spacer with groove to accept grout finish. Allows for the use of both silicone or grout external finishes.



Pegasus Vinyl Spacers

Manufactured exclusively to fit the deeper profile of the Pegasus Line Products.

